



# CLOSE-TYPE COOLING TOWER

## FEATURES:

1. Closed indirect cooling with PE tube design to prevent scale problems.
2. Improve the stability of the molding machine, ensure product quality.
3. Simple structure, easy maintenance.

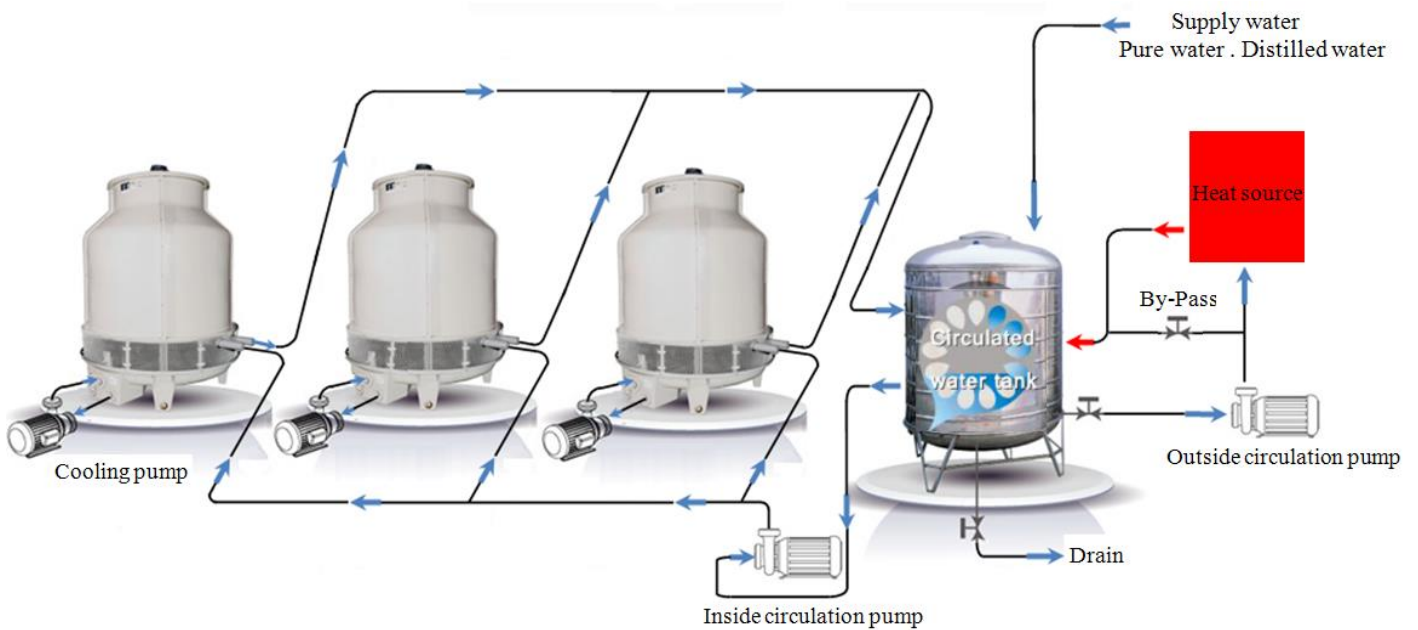

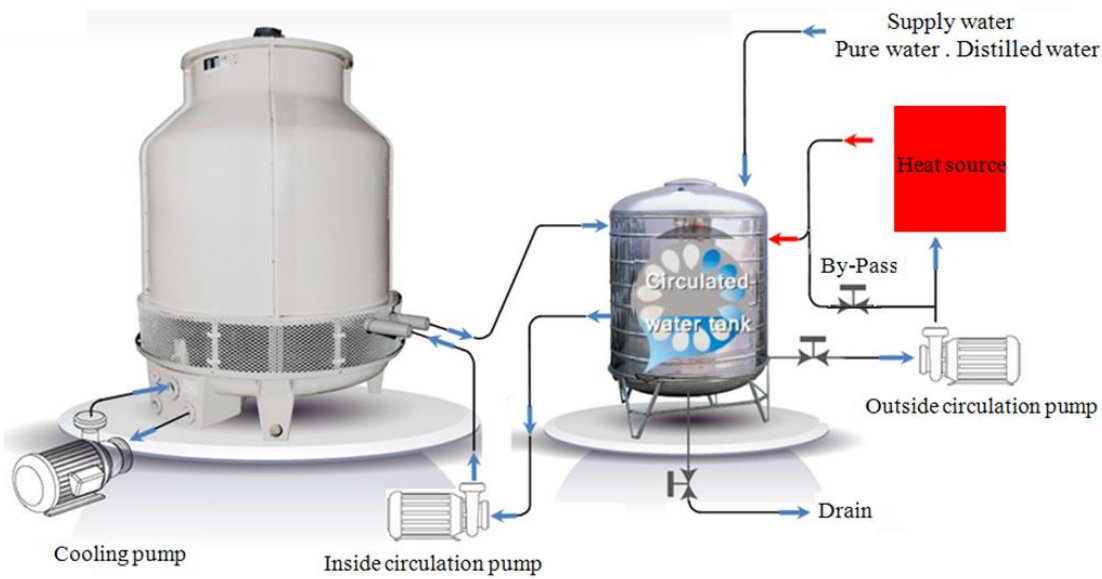

**CLOSED-TYPE COOLING TOWER SPECIFICATIONS**

Model		BCT-15	BCT-20	BCT-25	BCT-30	BCT-40
Cooling capacity	KCAL/HR	58,500	78,000	97,500	117,000	156,000
Water flow	LPM	150	200	250	300	400
Cooling Type		Closed indirect cooling				
Cooling fan	KW	0.20	0.40	0.60	0.75	0.75
	CMM	135	180	160	200	260
Cooling pump	KW	0.40	0.40	0.75	0.75	1.50
Piping	Warm water	INCH	2-1/2			
	Cool water		2-1/2			
	Supply water		1/2			
Total load	KW	0.60	0.80	1.35	1.50	2.25
Dimension	CM	φ 130*220	φ 130*220	φ 150*220	φ 170*240	φ 190*250
Approx. weight	KG	125	140	180	220	280
Option	1.SUS304 water tank 4.Cleaning agent		2.Circulation pump		3.Piping-cleaning machine	
Remarks	1.The cooling capacity is based on the cooling water inlet water temperature 37°C, outlet water temperature 32 °C, and the outside air wet bulb (WB) temperature conditions of 27 °C. 2.This product can be single or multiple parallel use. 3.Select the outdoor with good air flow and dustless place to install is preferred. 4.We reserve the right to change specifications without prior notice.					